

### SPINchiller<sup>3</sup> FC

**Liquid chiller with FREE-COOLING**

Air cooled

Outdoor installation


**Capacity from 299 to 1114 kW**

HYDRONIC




- ✓ Double independent circuits for high reliability with scroll compressors
- ✓ Solution for cold climates and industrial application
- ✓ Refrigerant R410A - GWP = 2088
- ✓ Operation down to -39°C outdoor air temperature, low water temperature down to -8°C
- ✓ Direct Free-cooling and No-glycol Free-cooling
- ✓ Two acoustic configurations
- ✓ Modular operation management, up to 8 units in cascade
- ✓ Integrated hydronic assembly and partial recovery

### functions and features

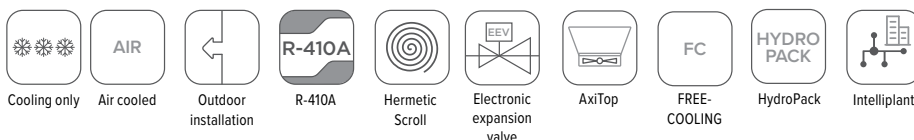

### dimensions and clearances

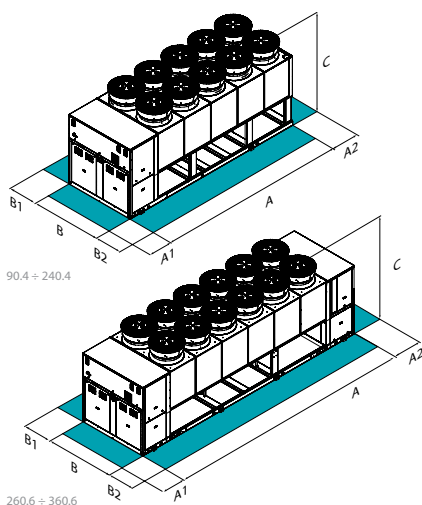

Size	▶▶ WSAT-XSC3 FC	90.4	100.4	110.4	120.4	140.4	160.4	180.4	200.4	220.4	240.4
A - Length	mm	4543	4543	4543	4543	5518	5518	5518	6454	6454	6454
B - Width	mm	2243	2243	2243	2243	2243	2243	2243	2243	2243	2243
C - Height	mm	2668	2668	2668	2668	2668	2668	2668	2668	2668	2668
A1	mm	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500
A2	mm	700	700	700	700	700	700	700	700	700	700
B1	mm	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200
B2	mm	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200
Operating weight	kg	3940	3994	4037	4105	4593	4645	4899	5758	5851	5899

Size	▶▶ WSAT-XSC3 FC	260.6	280.6	300.6	320.6	340.6	360.6
A - Length	mm	8648	8648	10598	10598	10598	10598
B - Width	mm	2243	2243	2243	2243	2243	2243
C - Height	mm	2668	2668	2668	2668	2668	2668
A1	mm	1500	1500	1500	1500	1500	1500
A2	mm	1500	1500	1500	1500	1500	1500
B1	mm	1200	1200	1200	1200	1200	1200
B2	mm	1200	1200	1200	1200	1200	1200
Operating weight	kg	7184	7274	8632	8714	8817	8920

The above mentioned data are referred to standard units for the constructive configurations indicated. For all the other configurations, refer to the relative Technical Bulletin.

#### CAUTION!

For trouble-free operation of the unit it is essential to maintain the safety distances indicated by the green areas.

## versions and configurations

### VERSION:

**EXC** Excellence (Standard)

### LOW TEMPERATURE:

- Low temperature: not required (Standard)

**B** Water low temperature

### ACOUSTIC CONFIGURATION:

**SC** Acoustic configuration with compressor soundproofing (Standard)

**EN** Super-silenced acoustic configuration

### FREE-COOLING:

**FCD** Direct FREE-COOLING (Standard)

**FCI** No-glycol FREE-COOLING

### EXTERNAL SECTION FAN CONSUMPTION REDUCTION:

**CREFP** Device for fan consumption reduction of the external section at variable speed (phase-cutting) (standard in the SC acoustic config. )

**CREFB** Device for fan consumption reduction of the external section, ECOBREEZE type (standard in the EN acoustic config. )

### TYPE FAN EXTERNAL SECTION:

**AXIX** High efficiency diffuser for axial fan - AxiTop (Standard)

**NAXI** High efficiency diffuser for axial fan - AxiTop: not required

## technical data

Size				▶▶ WSAT-XSC3 FC	90.4	100.4	110.4	120.4	140.4	160.4	180.4	200.4	220.4	240.4	260.6	280.6	300.6	320.6	340.6	360.6	
<b>Free-Cooling Off</b>																					
SC-EXC	Cooling capacity	(1)	kW		299	325	361	397	452	509	566	632	664	718	799	845	955	1008	1059	1114	
SC-EXC	Total power input	(1)	kW		79,5	86,8	96,6	110	123	139	164	174	193	214	235	255	265	286	308	330	
SC-EXC	EER at full load	(1)	-		3,76	3,75	3,74	3,62	3,68	3,65	3,46	3,64	3,45	3,36	3,4	3,31	3,61	3,53	3,44	3,38	
SC-EXC	SEER	(4)	-		4,64	4,65	4,62	4,56	4,66	4,65	4,59	4,64	4,62	4,56	4,61	4,59	4,60	4,65	4,62	4,56	
SC-EXC	$\eta_{sc}$	(4)	%		182,6	183,0	181,8	179,4	183,4	183,0	180,6	182,6	181,8	179,4	181,4	180,6	181,0	183,0	181,8	179,4	
<b>Direct Free-cooling on</b>																					
SC-EXC	Cooling capacity	(2)	kW		278	284	294	304	425	439	448	570	574	582	734	740	885	894	913	939	
SC-EXC	Total power input	(2)	kW		9,8	9,9	9,9	10,1	13	13,3	13,5	16,5	16,6	16,7	20,2	20,2	26,6	26,6	26,6	26,6	
SC-EXC	EER at full load	(2)	-		28,43	28,83	29,85	30,16	32,77	33,08	33,31	34,63	34,62	34,85	36,34	36,63	33,27	33,61	34,32	35,3	
SC-EXC	Refrigeration circuits		Nr		2																
SC-EXC	No. of compressors		Nr		4																
SC-EXC	Type of compressors		-		SCROLL																
SC-EXC	Refrigerant		-		R-410A																
SC-EXC	Standard power supply		V		400/3~/50																
SC-EXC	Sound power level	(3)	dB(A)		92	92	92	92	92	93	95	95	95	95	94	95	96	96	97	97	
EN-EXC	Sound power level	(3)	dB(A)		87	87	87	87	88	89	91	92	92	92	90	91	92	93	93	93	

(1) Data referred to the following conditions: internal exchanger water temperature = 15/10 °C; glycol 30%; entering external exchanger air temperature 30°C

(2) Free-Cooling only data (compressors OFF) referred to the following conditions: internal exchanger water temperature = 15/10°C; entering external exchanger air temperature = 2°C D.B./1°C W.B.; glycol 30%

(3) Sound pressure levels are referred to units operating at nominal load in nominal conditions. Measurements are carried out accordingly to UNI EN ISO 9614-1 at nominal standard conditions defined in respective regulations: EU 2016/2281, UE 813/2013, UE 811/2013.

(4) Data calculated according to the EN 14825:2018 Regulation

## accessories

<b>2PM</b>	Hydropack user side with 2 pumps
<b>3PM</b>	Hydropack load side with 3 pumps
<b>4PM</b>	Hydropack user side with 4 pumps
<b>6PM</b>	Hydropack user side with 6 pumps
<b>2PMV</b>	Hydropack user side with no.2 of inverter pumps
<b>3PMV</b>	Hydropack user side with no.3 of inverter pumps
<b>6PMV</b>	Hydropack user side with 6 inverter pumps
<b>IVFDT</b>	Inverter driven variable flow-rate user side control depending on the temperature differential
<b>IFWX</b>	Steel mesh strainer on the water side
<b>CSVX</b>	Couple of manually operated shut-off valves
<b>CCCA</b>	Copper / aluminium condenser coil with acrylic lining
<b>CCCA1</b>	Condenser coil with Aluminium Energy Guard DCC treatment
<b>AMMX</b>	Rubber antivibration mounts
<b>PGFC</b>	Finned coil protection grill
<b>PGCCH</b>	Anti-hail protection grilles
<b>CONTA2</b>	Energy meter
<b>RPRPDI</b>	Refrigerant leak detector with pump down function in the casing
<b>RCMRX</b>	Remote control via microprocessor control
<b>PSX</b>	Mains power supply
<b>CMSC10</b>	Serial communication module for LonWorks supervisor
<b>CMSC9</b>	Serial communication module for Modbus supervisor
<b>CMSC11</b>	Serial communication module for BACnet-IP supervisor
<b>SCP4</b>	Set-point compensation with 0-10 V
<b>SPC2</b>	Set-point compensation with outdoor air temperature probe

<b>ECS</b>	ECOSHARE function for the automatic management of a group of units
<b>PFCP</b>	Power factor correction capacitors (cosfi > 0.9)
<b>SFSTR</b>	Disposal for inrush current reduction
<b>MHP</b>	High and low pressure gauges
<b>SDV</b>	Cutoff valve on compressor supply and return
<b>WOLLY</b>	Unit supplied without glycol solution (FCI only)
<b>A550</b>	550 l. storage tank (FCD only)
<b>A700</b>	700 l. storage tank (FCD only)
<b>A900</b>	900 l. storage tank (FCD only)
<b>PSPS</b>	Set up for single power supply (260.6÷360.6)
<b>RE-20</b>	Electrical panel antifreeze protection for min. outdoor temperature down to -20°C
<b>RE-25</b>	Electrical panel antifreeze protection for min. outdoor temperature down to -25°C
<b>RE-30</b>	Electrical panel antifreeze protection for min. outdoor temperature down to -30°C
<b>RE-35</b>	Electrical panel antifreeze protection for min. outdoor temperature down to -35°C
<b>RE-39</b>	Electrical panel antifreeze protection for min. outdoor temperature down to -39°C
<b>CBS</b>	Overload circuit breakers (260.6÷360.6)

Accessories whose code ends with "X" are supplied separately